

Veritas NetBackup™ for MariaDB Administrator's Guide

Windows and Linux

Release 8.1.2



Documentation version: 8.1.2

Legal Notice

Copyright © 2018 Veritas Technologies LLC. All rights reserved.

Veritas and the Veritas Logo are trademarks or registered trademarks of Veritas Technologies LLC or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

This product may contain third-party software for which Veritas is required to provide attribution to the third party ("Third-party Programs"). Some of the Third-party Programs are available under open source or free software licenses. The License Agreement accompanying the Software does not alter any rights or obligations you may have under those open source or free software licenses. Please see the Third Party Legal Notice Appendix to this Documentation or TPIP ReadMe File accompanying this product for more information on the Third Party Programs.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Veritas Technologies LLC and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. VERITAS TECHNOLOGIES LLC SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, et seq. "Commercial Computer Software and Commercial Computer Software Documentation," as applicable, and any successor regulations, whether delivered by Veritas as on premises or hosted services. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Veritas Technologies LLC
500 E Middlefield Road
Mountain View, CA 94043

<http://www.veritas.com>

Technical Support

Technical Support maintains support centers globally. Technical Support's primary role is to respond to specific queries about product features and functionality. The Technical Support group also creates content for our online Knowledge Base. The Technical Support group works collaboratively with the other functional areas within the company to answer your questions in a timely fashion.

Our support offerings include the following:

- A range of support options that give you the flexibility to select the right amount of service for any size organization
- Telephone and/or Web-based support that provides rapid response and up-to-the-minute information
- Upgrade assurance that delivers software upgrades
- Global support purchased on a regional business hours or 24 hours a day, 7 days a week basis
- Premium service offerings that include Account Management Services

For information about our support offerings, you can visit our website at the following URL:

www.veritas.com/support

All support services will be delivered in accordance with your support agreement and the then-current enterprise technical support policy.

Contacting Technical Support

Customers with a current support agreement may access Technical Support information at the following URL:

www.veritas.com/support

Before contacting Technical Support, make sure you have satisfied the system requirements that are listed in your product documentation. Also, you should be at the computer on which the problem occurred, in case it is necessary to replicate the problem.

When you contact Technical Support, please have the following information available:

- Product release level
- Hardware information
- Available memory, disk space, and NIC information

- Operating system
- Version and patch level
- Network topology
- Router, gateway, and IP address information
- Problem description:
 - Error messages and log files
 - Troubleshooting that was performed before contacting Technical Support
 - Recent software configuration changes and network changes

Licensing and registration

If your product requires registration or a license key, access our technical support Web page at the following URL:

www.veritas.com/support

Customer service

Customer service information is available at the following URL:

www.veritas.com/support

Customer Service is available to assist with non-technical questions, such as the following types of issues:

- Questions regarding product licensing or serialization
- Product registration updates, such as address or name changes
- General product information (features, language availability, local dealers)
- Latest information about product updates and upgrades
- Information about upgrade assurance and support contracts
- Advice about technical support options
- Nontechnical presales questions
- Issues that are related to CD-ROMs, DVDs, or manuals

Support agreement resources

If you want to contact us regarding an existing support agreement, please contact the support agreement administration team for your region as follows:

Worldwide (except Japan)

CustomerCare@veritas.com

Contents

Technical Support	4
Chapter 1 Introduction to NetBackup for MariaDB Agent	9
About NetBackup for MariaDB Agent	9
Features of NetBackup for MariaDB	10
The NetBackup for MariaDB Agent package	10
About the NetBackup for MariaDB Agent license	11
Chapter 2 Installing the NetBackup for MariaDB Agent	12
Planning the installation of NetBackup for MariaDB Agent	12
Verifying the operating systems and the platforms	13
Installing prerequisites for NetBackup for MariaDB Agent	13
Post-installation requirements for NetBackup for MariaDB Agent	14
Describing the NetBackup for MariaDB Agent package	15
Installing NetBackup for MariaDB Agent	16
Authenticating the password	16
Uninstalling the NetBackup for MariaDB Agent	17
Chapter 3 Configuring the NetBackup for MariaDB	18
The nbmariadb.conf configuration file	18
Configuring the MariaDB backups with DataStore policies	20
Chapter 4 NetBackup for MariaDB backup and restore	22
About MariaDB backups	22
Performing MariaDB backups	24
Validating the backup information	25
Querying the backups	26
Deleting backup information from the NetBackup catalog files	27
About restoring MariaDB backups	27
Performing the restores for MariaDB databases	29
Redirected restores	29
Disaster recovery	30

Chapter 5	Troubleshooting for NetBackup for MariaDB	31
	Troubleshooting errors when using NetBackup for MariaDB	31
Appendix A	About NetBackup for MariaDB commands and conventions	37
	About NetBackup for MariaDB commands	37
	About NetBackup for MariaDB command conventions	38
Appendix B	The NetBackup for MariaDB commands	40
	nbmariadb -o backup	41
	nbmariadb -o restore	43
	nbmariadb -o query	44
	nbmariadb -o delete	45
Index		46

Introduction to NetBackup for MariaDB Agent

This chapter includes the following topics:

- [About NetBackup for MariaDB Agent](#)
- [Features of NetBackup for MariaDB](#)
- [The NetBackup for MariaDB Agent package](#)
- [About the NetBackup for MariaDB Agent license](#)

About NetBackup for MariaDB Agent

NetBackup for MariaDB extends the capabilities of NetBackup to include backups and restores of the MariaDB databases. The NetBackup for MariaDB agent is located on the NetBackup client and supports the operations on standalone setups. The agent supports the MariaDB version 5.5 and later.

The agent also supports to:

- Validate the backup.
- Query a backup and restore.
- Delete the backup information from the catalog files.
- Redirect restores.

Note: Ensure that the MariaDB agent and NetBackup are of same version for successful backup and restore operations.

NetBackup for MariaDB workflow

The NetBackup for MariaDB Agent reads the parameters from the `nbmariadb.conf` file and then initiates the operations. The `nbmariadb.conf` file includes the parameters that you must set to run the respective operations.

The agent communicates with the MariaDB database to create a snapshot. The Volume Shadow Copy Services (VSS) for Windows or Logical Volume Manager (LVM) for Linux, takes a snapshot of the MariaDB database.

The agent then interacts with the NetBackup XBSA interface to update the server name, policy, and schedule type information. The NetBackup master server connects to the NetBackup client to backup or retrieve the data that you want to protect.

The agent mounts the snapshot, copies the file, and then sends it to the NetBackup XBSA interface. The NetBackup XBSA interface then writes this data to the mounted media or disk storage managed by the NetBackup media server.

Features of NetBackup for MariaDB

[Table 1-1](#) lists the features that are supported by the agent.

Table 1-1 Features supported by NetBackup for MariaDB agent

Feature	Description
Backup	The agent supports full instance backups of the MariaDB database.
Restore	The agent supports full instance restores of MariaDB backups.
Redirected restore	The agent supports restoring MariaDB backups to alternate NetBackup clients.

The NetBackup for MariaDB Agent package

The agent is packaged in `NBMariaDBAgent_8.1.zip` file and is available on my.veritas.com site.

The package file contains the following platform files:

- (Windows) `NBMariaDBAgent_8.1_AMD64/`
- (Linux RHEL) `NBMariaDBAgent_8.1_linuxR_x86/`
- (Linux SLES) `NBMariaDBAgent_8.1_linuxS_x86/`

About the NetBackup for MariaDB Agent license

The NetBackup for MariaDB Agent is installed on the NetBackup client software and is not a separately licensed option of NetBackup. The NetBackup for MariaDB Agent is available to customers who are entitled with a valid license of the Application and Database License Pack. In general, licensing of the NetBackup for MariaDB Agent follows the existing capacity licensing models for supported database agents.

Installing the NetBackup for MariaDB Agent

This chapter includes the following topics:

- [Planning the installation of NetBackup for MariaDB Agent](#)
- [Verifying the operating systems and the platforms](#)
- [Installing prerequisites for NetBackup for MariaDB Agent](#)
- [Post-installation requirements for NetBackup for MariaDB Agent](#)
- [Describing the NetBackup for MariaDB Agent package](#)
- [Installing NetBackup for MariaDB Agent](#)
- [Authenticating the password](#)
- [Uninstalling the NetBackup for MariaDB Agent](#)

Planning the installation of NetBackup for MariaDB Agent

[Table 2-1](#) lists the planning steps that are mandatory for installing the agent.

Table 2-1 General steps for installing the agent

Step	Action
Step 1	Verify the operating systems. For more information, See “Planning the installation of NetBackup for MariaDB Agent” on page 12.

Table 2-1 General steps for installing the agent (*continued*)

Step	Action
Step 2	Verify the prerequisites before you install the agent. For more information, See “Planning the installation of NetBackup for MariaDB Agent” on page 12.
Step 3	Install the NetBackup for MariaDB Agent on your operating system. For more information, See “Planning the installation of NetBackup for MariaDB Agent” on page 12.
Step 4	Authenticate the password for backups. For more information, See “Planning the installation of NetBackup for MariaDB Agent” on page 12.

Verifying the operating systems and the platforms

Verify that the NetBackup for MariaDB Agent is supported on your operating system or platforms.

The agent supports the operations on following platforms:

- Red Hat Enterprise Linux (RHEL) 6.8 and later
- SUSE Enterprise Linux Server 11 SP4 and later
- Microsoft Windows Server 2008 R2 and later
- Microsoft Windows 8.1 and later
- NetBackup 8.1 (Server and client)
- NetBackup XBSA SDK 1.1.0

Installing prerequisites for NetBackup for MariaDB Agent

Before you install, ensure that you meet the following prerequisites:

- NetBackup 8.1 and later is installed and operational on the master server, media server, and the client.
- Ensure that versions of the MariaDB agent and NetBackup are same. If you upgrade NetBackup to newer version, then you must upgrade the agent version also.

- The MariaDB database is installed and operational on the client.

Post-installation requirements for NetBackup for MariaDB Agent

After you install

- (Windows) Configure the NetBackup for MariaDB Agent to run with administrative privileges.
- (Windows) Add the NetBackup `bin` directory to the `PATH` user environment variable.
- (Linux) The user of the agent is a superuser or has superuser privileges.
- (Linux) Symbolic link: If a symbolic link does not exists, create a symbolic link `libmariadb.so` or `libmysqlclient.so` and ensure that it points to `libmariadb.so.<n>` and `libmysqlclient.so.<n>` respectively, where `<n>` is the MariaDB client library version. You can create the symbolic link at your chosen directory.

The client library name is `libmysqlclient.so` in older versions of MariaDB and `libmariadb.so` in newer versions.

For example, if the MySQL client library version is 18, then the symbolic link `libmysqlclient.so` points to `libmysqlclient.so.18`.

Note: Ensure that you update the `MARIADB_LIB_INSTALL_PATH` parameter in the `nbmariadb.conf` file with the absolute path of the symbolic link.

- Set the privileges for the MariaDB users for backup and restore operations. [Table 2-2](#) lists the user type and the privileges for the respective user.

Table 2-2 User and privileges

User type	Privileges
Backup	LOCK TABLES, SELECT FILE, RELOAD, SUPER, UPDATE, TRIGGER, SHOW, VIEW, EXECUTE, and EVENT.
Restore	CREATE, DROP, INDEX, SHUTDOWN, INSERT, ALTER, DELETE, UPDATE, TRIGGER, SUPER, and CREATE VIEW.

To set the MariaDB server user privileges, run the following MariaDB commands:

```
GRANT SELECT, INSERT, UPDATE, CREATE, DROP, RELOAD, SHUTDOWN, FILE,  
INDEX, ALTER, SUPER, LOCK TABLES, CREATE VIEW, SHOW VIEW, TRIGGER,  
CREATE ROUTINE, DELETE, EVENT, ALTER ROUTINE ON, *.* TO 'USER' @  
'localhost' IDENTIFIED BY 'PASSWORD';
```

For more information, refer to *MariaDB Administration Guide*.

Describing the NetBackup for MariaDB Agent package

The agent is packaged in the `NBMariaDBAgent_8.1.zip` file and is available on my.veritas.com site.

The package file contains the following platform files:

- (Windows) `NBMariaDBAgent_8.1_AMD64/`
- (Linux RHEL) `NBMariaDBAgent_8.1_linuxR_x86/`
- (Linux SUSE) `NBMariaDBAgent_8.1_linuxS_x86/`

(Windows) `NBMariaDBAgent_8.1_AMD64/` includes the following files:

- `NBMariaDBAgent_8.1_AMD64/README.txt`
- `NBMariaDBAgent_8.1_AMD64/cab1.cab`
- `NBMariaDBAgent_8.1_AMD64/Setup.exe`
- `NBMariaDBAgent_8.1_AMD64/NBMariaDBAgent.msi`

(Linux RHEL) `NBMariaDB_8.1_linuxR_x86/` includes the following files:

- `NBMariaDBAgent_8.1_linuxR_x86/README`
- `NBMariaDBAgent_8.1_linuxR_x86/install`
- `NBMariaDBAgent_8.1_linuxR_x86/LICENSE`
- `NBMariaDBAgent_8.1_linuxR_x86/pkg.tar`

(Linux SUSE) `NBMariaDBAgent_8.1_linuxS_x86/` includes the following files:

- `NBMariaDBAgent_8.1_linuxS_x86/README`
- `NBMariaDBAgent_8.1_linuxS_x86/install`
- `NBMariaDBAgent_8.1_linuxS_x86/LICENSE`
- `NBMariaDBAgent_8.1_linuxS_x86/pkg.tar`

When you install the agent, accept the VERITAS LICENSE AGREEMENT to proceed with installing the agent successfully.

The agent by default gets installed at the following locations:

- (Windows) `C:\Program Files\VERITAS\NBMariaDBAgent`
- (Linux RHEL & SUSE) `/usr/NBMariaDBAgent/`

Installing NetBackup for MariaDB Agent

To install the agent

- 1 Download the `NBMariaDBAgent_8.1.zip` file.
- 2 Extract the file that applies to your operating system:
(Windows) `NBMariaDBAgent_8.1_AMD64/`
(Linux RHEL) `NBMariaDBAgent_8.1_linuxR_x86/`
(Linux SUSE) `NBMariaDBAgent_8.1_linuxS_x86/`
- 3 Run the file that applies to your operating system
(Windows) `NBMariaDBAgent_8.1_AMD64/Setup.exe`
(Linux RHEL) `NBMariaDBAgent_8.1_linuxR_x86/install`
(Linux SUSE) `NBMariaDBAgent_8.1_linuxS_x86/install`
- 4 Type `y` to accept the VERITAS LICENSE AGREEMENT. The agent gets installed at the default location.

Note: Ensure that the MariaDB agent and NetBackup are of same version for successful backup and restore operations.

Authenticating the password

Authenticating the password keeps you from specifying the password every time you run a backup. The (Windows) `my.ini` file and the (Linux) `my.cnf` file stores the password and the application picks the password every time you run a backup.

Authenticating the password

The agent reads the plaintext authentication credentials from the `my.cnf` file in Linux and `my.ini` file in Windows.

Prerequisites

Before you authenticate the password, you must meet the following prerequisites:

- (Windows) Set the user environment variable `MYSQL_HOME` to point to `my.ini` file path.
- (Linux) Include the `Mariadb` bin directory in `$PATH`.

To authenticate the password

- 1 (Optional) Add the client section.
- 2 Under the Client section, edit the `my.ini` or `my.cnf` file to add the password. For example,

```
[client]
```

```
port=3306
```

```
password=<password>
```

- 3 To verify the password authentication, login to MariaDB server using the following command:

```
mysql -u <user>
```

Uninstalling the NetBackup for MariaDB Agent

To uninstall the agent

- 1 (Windows) From the **Control Panel**, right-click the `Veritas NetBackup MariaDBAgent_8.1` file and **Uninstall** the agent.
- 2 (Linux RHEL and SUSE) To uninstall, delete the `/usr/NBMariaDBAgent` directory from the installed location.

Configuring the NetBackup for MariaDB

This chapter includes the following topics:

- [The nbmariadb.conf configuration file](#)
- [Configuring the MariaDB backups with DataStore policies](#)

The nbmariadb.conf configuration file

The NetBackup for MariaDB (`nbmariadb.conf`) configuration file contains the parameters for the respective operations. It contains predefined settings and is located on the client. You can configure the parameters in the `nbmariadb.conf` file or provide them on the command line, where the command line parameters take precedence.

The `nbmariadb.conf` file keeps you from providing the parameters every time you run operations. When parameters are not configured in the `nbmariadb.conf` file, then the default parameter value takes precedence.

The `nbmariadb.conf` file is located in the following locations:

- (Windows)
`C:\Program Files\Veritas\NBMariaDBAgent\nbmariadb.conf`
- (Linux RHEL and SUSE) `/usr/NBMariaDBAgent/nbmariadb.conf`

[Table 3-1](#) lists the `nbmariadb.conf` file parameters:

Table 3-1 The nbmariadb.conf file parameters

Parameters	Description	Required parameter for	Default value
DB_PORT	Configures the MariaDB database server port number on which the backup or the restore should be performed. The port number verifies the MariaDB service status.	Backups and restores	When you do not specify the port number, the default is 3306.
DB_USER	Configures the MariaDB database user name.	Backups	When you do not specify the username, the default is root .
MARIADB_LIB_INSTALL_PATH	(Linux) Configures the libmariadb.so binary path.	Backups	No default value.
MASTER_SERVER_NAME	Specifies the NetBackup master server to run backups, restores query and delete the backups and restores.	Backups, restores, query, and delete.	No default value.
POLICY_NAME	Specifies the DataStore policy name.	Backups	No default value.
SCHEDULE_NAME	Identifies the backup schedule that you configured while creating the DataStore policy.	Backups	No default value.
CLIENT_NAME	Defines the NetBackup MariaDB client name.	Redirected restores and query	When you do not specify the client name, the default is NetBackup master server.
SNAPSHOT_SIZE	(Linux) Specifies the snapshot size for LVM snapshots. Specify the snapshot size in kilobytes, megabytes, or gigabytes as KB, MB, or GB respectively.	LVM backups	When you do not specify the snapshot size, the default is MB.
DB_BACKUP_ID	DB_BACKUP_ID is the backup image name. This parameter configures the backup file that you specify using the backup id.	To delete a backup by specifying its backup image name.	No default value.
MARIADB_TARGET_DIRECTORY	Specifies the destination directory where you want to restore the backups.	Restores	No default value.

Table 3-1 The nbmariadb.conf file parameters (*continued*)

Parameters	Description	Required parameter for	Default value
NBMARIADB_LOG_LEVEL	The NBMARIADB_LOG_LEVEL parameter lets you set the logging level for the nbmariadb logs. For a particular logging level, all details at that level or lower are logged. The nbmariadb debug logs includes the following verbose levels: ■ 1 – ERROR: Conditions that should be corrected, such as configuration errors. ■ 2 – WARN: Conditions that are not errors, but that might require special handling. ■ 3 – INFO: Informational messages ■ 4 – DEBUG: Debugging the messages that is used for troubleshooting.	The log levels help to control the amount of information that you want to access for troubleshooting errors.	When you do not specify the nbmariadb log level, the default is log level 1.
NBMARIADB_LOG_SIZE	Specifies the nbmariadb log size in MB. The default size is 10MB. When the log reaches the specified size, it overwrites the existing log information.	You can specify the value according to the events that you want to write into the logs.	When you do not specify the nbmariadb log size, the default is 10MB.

Configuring the MariaDB backups with DataStore policies

The agent supports the **DataStore** policies to define the attributes, schedules, clients list, and backup selections.

To configure the MariaDB database backups with DataStore policies

- 1 Log on to the master server as an administrator (Windows) or root (Linux).
- 2 In the **NetBackup Administration Console**, expand **NetBackup Management**, and then click **Policies**.
- 3 In **All Policies** pane, right-click **Summary of All Policies**, and then click **New Policy**.

- 4 In **Add a New Policy** dialog box, enter a unique name for the policy.
- 5 In the **Change Policy** dialog box, select **DataStore Policy** from **Policy Type** drop-down list.
- 6 From the **Policy Storage** drop-down list, select a **disk-based storage unit** for storage.
- 7 To select the schedule type, under the **Schedules** tab, click **OK** to select the **Application Backup** schedule type.

Note: The XBSA framework supports the **Application Backup** schedule type only.

- 8 Under the **Clients** tab, click **New** and then add the NetBackup client that has the **NetBackup for MariaDB Agent**.
- 9 In the **Add Client** screen, click **New**, and then in the **Client Name** field, type the name of the client.
- 10 In the **NetBackup Administration Console**, click **NetBackup Management > Policies** to view the policy in the existing policies list.
- 11 Verify the settings in `nbmariadb.conf` file, before you run the backup.
- 12 For more information, See [“The nbmariadb.conf configuration file”](#) on page 18.

Note: Ensure that the MariaDB agent and NetBackup are of same version for successful backup and restore operations.

NetBackup for MariaDB backup and restore

This chapter includes the following topics:

- [About MariaDB backups](#)
- [Performing MariaDB backups](#)
- [Validating the backup information](#)
- [Querying the backups](#)
- [Deleting backup information from the NetBackup catalog files](#)
- [About restoring MariaDB backups](#)
- [Performing the restores for MariaDB databases](#)
- [Redirected restores](#)
- [Disaster recovery](#)

About MariaDB backups

The `nbmariadb -o backup` command initiates the backup operation using the `-s`, `-P`, `-s` and `-l` as required parameters. The parameter `-z` is the required parameter for Linux operating systems.


The parameter `portnum` is the optional parameter. Configure these parameters in the `nbmariadb.conf` file or provide them on the `nbmariadb` command line, where the parameters provided on the command line takes precedence.

The agent protects the following files:

- Schema files that are associated with all database tables.
- Files that are associated with the database tables.
- Data and index files.

Note: Ensure that the MariaDB agent and NetBackup are of same version for successful backup and restore operations.

Figure 4-1 NetBackup for MariaDB backup workflow

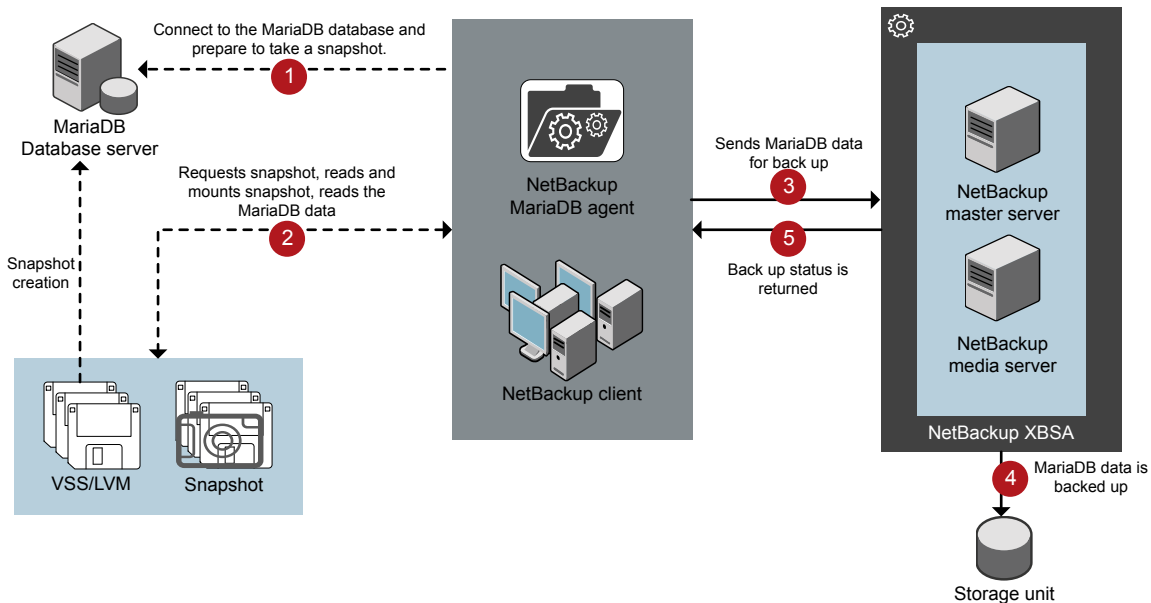

The NetBackup for MariaDB workflow

When you initiate a backup, the agent connects to the MariaDB database to execute a flush and read only lock on all tables. The agent then reads the associated NetBackup for MariaDB Agent database files from the mounted directory and initiates the backup. The LVM or VSS, then creates a snapshot, and mounts the snapshot.

The agent copies the associated files (the whole instance or the individual database) and then sends to the NetBackup XBSA interface. The NetBackup XBSA interface writes this data to the mounted media or disk storage managed by the NetBackup media server.

The command prompt displays the successful completion status of the backup. The **Activity Monitor** also displays the status for the backup job.

Performing MariaDB backups

Prerequisites

Before you perform the backups, you must meet the following prerequisites:

- Ensure that versions of the MariaDB agent and NetBackup are same. If you upgrade NetBackup to newer version, then you must upgrade the agent version also.
- (LVM users) Ensure that the MariaDB data directory and logs directory reside on logical volumes.
- (Windows) Set the `NetBackup\bin` directory in the environment variable.
For example, `Path =C:\Program Files\Veritas\Netbackup\bin`
- (Windows) Set the `MariaDB\bin` directory in user environment variable.
- Configure the **DataStore** policy from the **NetBackup Administration Console**.
- (LVM) Verify that there is enough space for the snapshot in the volume group, and then set the snapshot size in `nbmariadb.conf` file or by the command line.

Note: Ensure that the snapshot size is 50% of the instance size that you want to backup.

- (Linux) Create a symbolic link `libmariadb.so` and ensure that it points to the correct `libmariadb.so.<n>` library version.
Ensure that you update the `MARIADB_LIB_INSTALL_PATH` parameter in the `nbmariadb.conf` file with the absolute path of the symbolic link.
For more information, See [“Post-installation requirements for NetBackup for MariaDB Agent”](#) on page 14.
- Set the `FLUSH` and `LOCK` user privileges.
- Set the following parameters in the `nbmariadb.conf` file:
 - `DB_USER`

- DB_PORT
- MASTER_SERVER_NAME
- POLICY_NAME
- SCHEDULE_NAME
- MARIADB_LIB_INSTALL_PATH
- (Linux) SNAPSHOT_SIZE
- Verify the installing prerequisites and post-installation requirements.
For more information, See “Installing prerequisites for NetBackup for MariaDB Agent” on page 13.
For more information, See “Post-installation requirements for NetBackup for MariaDB Agent” on page 14.

To run the backup

- 1 Run the following command:

```
nbmariadb -o backup  
  
-S master_server_name  
  
-P policy_name  
  
-s schedule_name  
  
(Linux)-z snapshot_size  
  
-l mariadb_library_path  
  
[-portnum db_port]  
  
[-u db_user]
```

- 2 (Optional) When prompted, type the database password. The NetBackup then connects to the database and initiates the backup.

Scheduling MariaDB backups from the NetBackup

You can schedule the MariaDB backups from the **NetBackup Administration Console** using the **DataStore** policy to call a backup script.

For more information, https://www.veritas.com/support/en_US/article.100041621

Validating the backup information

After a successful backup, you can list the backups to view and verify the backup information using the following command:

```
nbmariadb -o query
```

Querying the backups

The `nbmariadb query` command lists the backup files according to the options that you specify. You can configure these parameters from the `nbmariadb.conf` file or provide the parameters using the `nbmariadb` command line. The parameter `-S` is the required parameter. Alternatively, you can query the backups using the `-C` and `-P` options to define a different client and policy.

By default, NetBackup uses the values that you have configured in the `nbmariadb.conf` file.

Before you run a query, you must set the following parameters in the `nbmariadb.conf` file or provide on the command line:

- `CLIENT_NAME`
- `POLICY_NAME`
- `MASTER_SERVER_NAME`

To query backup

- 1 Configure the settings in the `nbmariadb.conf` file or the `nbmariadb` command line.
- 2 Run the following command:

```
nbmariadb -o query -S master_server_name [-C client_name] [-P  
policy_name]
```

For example, to query a backup from Client A, run the following command:

```
nbmariadb -o query -S master_server_name [-C ClientA]
```

For example, to list backup files with the policy name `policy_name`, run the following command:

```
nbmariadb -o query -S master_server_name [-P policy_name]
```

For example, to query a backup from the client `Client A` with policy name `policy_name`, run the following command:

```
nbmariadb -o query -S master_server_name [-C ClientA] [-P policy_name]
```

Deleting backup information from the NetBackup catalog files

The `nbmariadb` command for delete, removes the backup information from the catalog files but retains the backup files on the NetBackup media server. The parameter `-s` and `-id` are required parameters.

Before you delete the backups, you must set the following parameter in the `nbmariadb.conf` file or provide them on the command line:

- `DB_BACKUP_ID`
- `MASTER_SERVER_NAME`

To delete a backup

- 1 Configure the parameters, in the `nbmariadb.conf` file or the `nbmariadb` command line.
- 2 Run the following command:

```
nbmariadb -o delete -S master_server_name -id db_backup_image_name.
```


About restoring MariaDB backups

The `nbmariadb -o restore` command for restore initiates the restore operation using `-s`, `-t`, and `portnum` as the required parameters. The parameters `-id` and `-c` are optional parameters.

The parameter `-id` restores the backup using the specified backup image name. The parameter `-c` lists all the backups that exists on the specified client. When you do not specify the client, it defaults to NetBackup master server.

Note: Ensure that the MariaDB agent and NetBackup are of same version for successful backup and restore operations.

Figure 4-2 NetBackup for MariaDB restore workflow

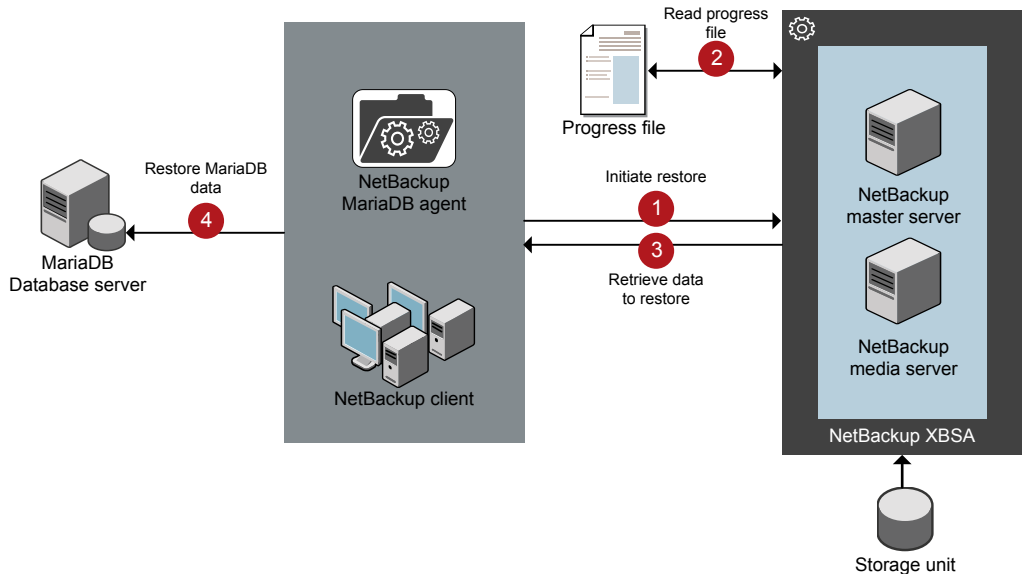

The NetBackup for MariaDB restore workflow

When you initiate a restore, the agent reads the command line arguments and parses the `nbmariadb.conf` configuration file. The agent then interacts with the NetBackup XBSA interface to retrieve the backup according to the specified parameters.

The NetBackup XBSA interface reads the progress files to receive the MariaDB backup files to restore them to the target directory.

The command prompt indicates the successful completion status of the restore. The **Activity Monitor** also displays the status for the restore job.

Prerequisites

Before you run a restore, you must meet the following prerequisites:

- Ensure that versions of the MariaDB agent and NetBackup are same. If you upgrade NetBackup to newer version, then you must upgrade the agent version also.

- (LVM users) Ensure that data logs and the logs directory reside on logical volumes
- Ensure that you restore the MariaDB instance to a valid empty target directory.
- (non-LVM) Ensure that the MariaDB service is running.
- Set the following parameters in the `nbmariadb.conf` file:
 - `CLIENT_NAME`
 - `DB_BACKUP_ID`
 - (Linux) `DB_PORT`
 - `MARIADB_TARGET_DIRECTORY`
 - `MASTER_SERVER_NAME`

Performing the restores for MariaDB databases

To restore backup

- 1 Configure the parameters in the `nbmariadb.conf` file, or the `nbmariadb` command line.
- 2 Run the following command:

```
nbmariadb -o restore -S master_server_name -t target_directory
portnum db_port [-id db_backup_image_name] [-C client_name]
```

- 3 Restart the MariaDB services.

Redirected restores

Redirected restores lets you restore backup files to a client different from the client that originally performed the backup. The new location can be a different host or a different file path using a different name for the redirected restore. To redirect a restore to a different host, include the destination client name in the `install_path\NetBackup\db\altnames` directory.

Note: Ensure that the MariaDB agent and NetBackup are of same version for successful backup and restore operations.

Performing redirected restores

To redirect a restore to a different host

- 1 Update the `nbmariadb.conf` file with the NetBackup client name as the host and the MariaDB target directory as the directory where you want to redirect the restore.
- 2 On the NetBackup master server, create an `altnames` directory for the host that you want to have permission to perform the redirected restore.

For example, to give Host B permissions to restore from another host, create the following file:

- (Windows) `install_path\NetBackup\db\altnames\HostB`
- (Linux RHEL and SLES) `/usr/opensv/netbackup/db/altnames/HostB`

- 3 In the `altnames` directory, add the names of the client(s) whose files the requesting client wants to restore.

For example, if you want Host B to have permissions to redirect restores from Host A, add Host A to the Host B file.

- 4 Run the following command:

```
nbmariadb -o restore -S master_server_name -t target_directory
-portnum db_port [-id db_backup_image_name] [-C client_name]
```

- 5 After a successful redirected restore, undo the changes that you made on the master server and the client.

To redirect a restore to a different file path

- 1 Run the following command:

```
nbmariadb -o restore -S master_server_name -t target_directory
-portnum db_port [-id db_backup_image_name] [-C client_name]
```

- 2 After a successful restore, change the ownership of data directory to MariaDB user.
- 3 Copy the restore data to the data directory.

Disaster recovery

Disaster recovery is the plan to recover the data that may get lost in a disaster event. The agent supports redirected restore as a disaster recovery strategy.

For more information, See [“Redirected restores”](#) on page 29.

Troubleshooting for NetBackup for MariaDB

This chapter includes the following topics:

- [Troubleshooting errors when using NetBackup for MariaDB](#)

Troubleshooting errors when using NetBackup for MariaDB

General guidelines to resolve problems

[Table 5-1](#) lists the general steps that help you resolve problems you may encounter while using NetBackup for MariaDB Agent.

Table 5-1 General steps to resolve problems

Steps	Action	Description
Step1	Remember the error message	Error messages are usually the vehicles for telling you something went wrong. If you do not see an error on the command line, but still suspect a problem, check the logs and the reports. These can provide an error message that directly points to the problem. The logs and reports are essential troubleshooting tools.

Table 5-1 General steps to resolve problems (*continued*)

Steps	Action	Description
Step 2	Identify what you were doing when the problem occurred.	Ask the following questions: ■ What operation was tried? ■ What method did you use? ■ What type of server platform and operating system was involved? ■ If your site uses both master server and media server, was it a master server or a media server? ■ If a client was involved, what type of client was it? ■ Have you performed the operation successfully in the past? If so, what is different now? ■ What is the service pack level? ■ Do you use operating system software with the latest fixes supplied, especially those required for use with NetBackup? ■ Is your device firmware at a level, or higher than the level, at which it has been tested according to the posted device compatibility lists?
Step 3	Record all information.	Capture potentially valuable information: ■ The NetBackup logs. ■ The logs specific to NetBackup for MariaDB logs. ■ The logs specific to NetBackup XBSA .
Step 4	Correct the problem.	After you define the problem, use the information to correct it.
Step 5	Contact Technical Support	If you cannot solve the troubleshooting, contact the Technical support.

Troubleshooting errors using logs

To troubleshoot the errors, you can refer to the NetBackup logs, NetBackup for MariaDB Agent logs, and the NetBackup XBSA logs. These logs are located at the following locations:

The NetBackup logs are located at:

- `install_path\NetBackup\logs\bprd`
- `install_path\NetBackup\logs\bpcd`

- `install_path\NetBackup\logs\user_ops\dbext\logs`

You must enable the `bprd` and the `bpcd` log files. For more information, see the *NetBackup Troubleshooting Guide*

The logs that are specific to NetBackup for MariaDB Agent are located at:

- `install_path\nbmariadb.log`

The logs that are specific to NetBackup XBSA are located at:

- `<NetBackup_install_path>/netbackup/logs/exten_client`

Troubleshooting NetBackup errors

For troubleshooting NetBackup errors, see *Veritas NetBackup Troubleshooting Guide* and the *Veritas NetBackup Commands Reference Guide*

Troubleshooting NetBackup for MariaDB Agent errors

[Table 5-2](#) lists the errors and the solutions to troubleshoot the problems while running the operations.

Table 5-2 Troubleshooting NetBackup for MariaDB errors

Problems	Description	Solution
The <code>nbmariadb</code> backup fails with the following error: <i>Unable to load mariadb library</i>	You may encounter this problem when the <code>nbmariadb.conf</code> file is not updated with the following: ■ <code>MARIADB_LIB_INSTALL_PATH</code> ■ <code>MARIADB_LIB_INSTALL_PATH</code> does not point to <code>libmariadb.so.<n></code> library version.	Verify the following and then run the backup again: ■ Add or update the MariaDB library file location in the <code>nbmariadb.conf</code> file. ■ Ensure that the <code>MARIADB_LIB_INSTALL_PATH</code> is set to the correct path. It should point to <code>libmariadb</code> library version. ■ (Linux) Create a symbolic link <code>libmariadb.so</code> that points to the <code>libmariadb.so.<n></code> library version.
The <code>nbmariadb</code> backup fails with the following error: <i>Unable to connect to the database</i>	The <code>nbmariadb</code> backup fails when the <code>nbmariadb.conf</code> file is updated with invalid username or port number.	To add the appropriate database user name and port number ■ Configure the appropriate database user name and port number in the <code>nbmariadb.conf</code> file or provide the parameters from the <code>nbmariadbcommand</code> line. For more information, See “The nbmariadb.conf configuration file” on page 18.

Table 5-2 Troubleshooting NetBackup for MariaDB errors (*continued*)

Problems	Description	Solution
The <code>nbmariadb</code> backup fails with the following error: <i>Unable to load xbsa.dll</i>	The <code>nbmariadb</code> backup fails if the environment variable path is not updated with NetBackup bin directory.	To run a <code>nbmariadb</code> backup Update the environment variable path with <code>NetBackup_install_path/bin</code>.
The <code>nbmariadb</code> backup fails with the following error: <i>XBSA initiation failed</i>	The <code>nbmariadb</code> backup fails if the <code>nbmariadb.conf</code> file is not updated with the required parameters.	To run the <code>nbmariadb</code> backup - Configure the valid master server name, policy name, schedule type in the <code>nbmariadb.conf</code> file or from the command line. - Verify if there are communication errors between the <code>nbmariadb</code> agent and the NetBackup master server. For more information see the <i>NetBackup Administration guide</i>.
(Windows) <i>VSS snapshot creation failed</i>	The <code>nbmariadb</code> backup may fail when the user does not have the privileges to run the <code>nbmariadb</code> operations.	Run <code>cmd.exe</code> in Administrator mode.
The <code>nbmariadb</code> restore operation does not restore any data from the target NetBackup client.	The <code>nbmariadb</code> restore fails if the <code>nbmariadb.conf</code> file is not updated with the NetBackup client name and the target directory.	For a successful restore - Verify that the target directory is valid and empty. - Initiate the restore from the NetBackup source client. - Set the NetBackup client name and target directory parameters in the <code>nbmariadb.conf</code> file.
The <code>nbmariadb</code> backup fails with the following error: (Linux) <i>Error creating LVM snapshot</i>	The <code>nbmariadb</code> backup may fail when the volume group does not have sufficient space for the snapshot. To verify the space in the volume group	To verify the space in the volume group - To view the space in the volume, run the following command: <code>\$vgs</code> The command displays the volume group details. - Update the <code>nbmariadb.conf</code> file with the appropriate snapshot size. The snapshot should be equivalent to or more than the instance size.

Table 5-2 Troubleshooting NetBackup for MariaDB errors (*continued*)

Problems	Description	Solution
Error messages after a successful backup: <pre><volume_group>/<snapshot_name></pre> Read failure after 0 of 4096 at 29393616896: input or output error. OR <pre><volume_group>/<snapshot_name>:</pre> read failure after 0 of 4096 at 4096: input or output error.	The <code>nbmariadb</code> backup gives these errors when the volume group contains the snapshots. You can list the snapshots and then remove them before you run the backup again. Note: The <code>nbmariadb</code> created LVM snapshot names are prefixed with <code>mariadbsnap</code>	To remove the snapshots - To list the existing snapshot, run the following command: <pre>\$lvs</pre> The command displays the snapshot details. - To remove the snapshots, run the following command: <pre>\$ lvremove -f <volume_group>/<snapshot_name></pre>
The <code>nbmariadb</code> backup fails with the following error: <i>"Failed to load MariaDB Library"</i>	You may encounter this problem when the <code>nbmariadb.conf</code> file is not updated with the following: - MariaDB library file location. - The <code>MARIADB_LIB_INSTALL_PATH</code> does not point to <code>libmariadb.so.<n></code>	Verify the following and then run the backup again: - Add or update the MariaDB library file location in the <code>nbmariadb.conf</code> file. For more information, See "The nbmariadb.conf configuration file" on page 18. - Ensure that the <code>MARIADB_LIB_INSTALL_PATH</code> is set to the absolute path of the symbolic link. (Linux) Create a symbolic link <code>libmariadb.so</code> and ensure that it points to the correct <code>libmariadb.so.<n></code> library version. For more information, See "Post-installation requirements for NetBackup for MariaDB Agent" on page 14.

Table 5-2 Troubleshooting NetBackup for MariaDB errors (*continued*)

Problems	Description	Solution
The <code>nbmariadb</code> backup on Linux (LVM), fails with the following error: <i>Error unmounting the snapshot-Device or resource busy</i> OR <i>Error removing the snapshot-mariadbsnap_<timestamp></i>	The <code>nbmariadb</code> backup fails during an attempt to unmount the snapshot, the device, or when you remove the existing snapshots.	To unmount the snapshot 1 To list all mounted file systems run the following command: <pre>\$ mount-l</pre> 2 If the snapshot still exists, create a mount directory using the following command: <pre>\$mount<mount_directory></pre> Note: This directory is created in <code>/mnt/<snapshot_name></code>. The prefix names for snapshot are <code>pgsqlsnap</code>. 3 To remove the mount directory run the following command: <pre>\$rm -rf <mount_directory></pre> 4 To remove the snapshot manually run the following command: <pre>lvremove -f <volume_group>/<snapshot_name></pre>
Even after a successful restore, the MariaDB services failed to start.	The restore operation is successful, only when you restore the backup on a machine that has the same minor version of MariaDB. For example, if you back up a file from MariaDB version 10.2.x, then you must restore the file to a computer with MariaDB version 10.2.x.	■ Verify that the MariaDB agent and NetBackup are of same version for successful restore operations. ■ Verify that the MariaDB version from the backed up data is same as the MariaDB version on the computer where you want to restore the data.

About NetBackup for MariaDB commands and conventions

This appendix includes the following topics:

- [About NetBackup for MariaDB commands](#)
- [About NetBackup for MariaDB command conventions](#)

About NetBackup for MariaDB commands

This section describes the commands, options, and parameters that are available to run the `nbmariadb` operations. Each command contains a brief description, required parameters, and optional parameters for the respective operations. The NetBackup for MariaDB Agent supports only those commands, options, and parameters that are mentioned in this document.

Observe for the following:

- You must provide the parameters in the `nbmariadb.conf` file or on the `nbmariadb` command line.
- The parameters that you provide on the command line takes precedence over the `nbmariadb.conf` file.
- Specify the operation type `-o` on the `nbmariadb` command line.
- Specify the parameters and options for the respective operations on the `nbmariadb` command line or in the `nbmariadb.conf` file.

The NetBackup for MariaDB command options

Table A-1 The nbmariadb command options

Options	Description
-C	Configures the NetBackup client name for redirected restores.
-h	Displays the Help usage, when it is the only option on the <code>nbmariadb</code> command line.
-id	Configures the specified backup using the backup image name.
-l	Configures the MariaDB library path.
-o	Configures the operation type (backup, restore, query, and delete).
-P	Configures the DataStore policy.
-portnum	Configures the database server port number that identifies the MariaDB instance on which the backup or restore is performed.
-s	Configures the NetBackup schedule.
-S	Configures the NetBackup master server.
-t	Configures the target directory to restore the data.
-u	Configures the database user name.
-z	Configures the LVM snapshot size.

About NetBackup for MariaDB command conventions

This document uses the following conventions when describing commands that are specific when running the operations for MariaDB database.

Run the following commands in the command line interface to see the results:

- The `-help` command (`-h`) option prints a command-line usage message when it is the only option on the command line. For example,

```
nbmariadb -h
```

- Brackets [] indicate that the enclosed component of the command line is optional. Other parameters are required.

- Italics indicate that the information is user supplied. For example, you may provide the policy name and the schedule name for a backup operation.

```
nbmariadb -o backup -S master_server_name -P policy_name -s schedule_name
```

The NetBackup for MariaDB commands

This appendix includes the following topics:

- [nbmariadb -o backup](#)
- [nbmariadb -o restore](#)
- [nbmariadb -o query](#)
- [nbmariadb -o delete](#)

nbmariadb -o backup

nbmariadb -o backup – runs the backup operation from the NetBackup client.

SYNOPSIS

```
nbmariadb -o backup
-S master_server_name
-P policy_name
-s schedule_name
(Linux) -l mariadb_library_path
(LVM) -z snapshot_size
[-portnum db_port]
[-u db_user]
```

Description

This command invokes the backup operation from the NetBackup client using the NetBackup **DataStore** policy name and the schedule type. The parameter `-s` and `-P` are required parameters for Windows. The parameters `-l` and (LVM) `-z` are required parameters for Linux. The `-portnum` and `-u` are the optional parameters.

On Linux systems, the directory path is `/usr/NBMariaDBAgent/`

On Windows, the directory path is `install_path\NBMariaDBAgent\`

Options

`-l`
(Linux) Configures the MariaDB library directory

`-portnum`
Configures the database port number that identifies the MariaDB instance on which the backup is performed.

`-P`
Configures the NetBackup **DataStore** policy name.

`-S`
Configures the NetBackup server name.

- s Specifies the schedule name that you have configured for the **DataStore** policy.
- u Configures the database user name.
- z (LVM backups) Specifies the LVM snapshot size.

nbmariadb -o restore

`nbmariadb -o restore` – restores the backup files from the NetBackup server.

SYNOPSIS

```
nbmariadb -o restore -S master_server_name -t target_directory  
-portnum db_port[-id db_backup_image_name] [-C client_name]
```

Description

The `nbmariadb` command restores the backup file using `-t`, `-S`, and (non-LVM) `portnum` as the required parameters. The `-id` and `-C` are optional parameters.

On Linux systems, the directory path to this command is `/usr/NBMariaDBAgent/`

On Windows systems, the directory path to this command is
`install_path/NBMariaDBAgent/`

Options

`-C`

Specifies the client name.

`-id`

Specifies the backup image name.

`portnum`

Specifies the database server port.

`-S`

Configures the NetBackup master server.

`-t`

Configures the target directory where the backups are restored.

nbmariadb -o query

`nbmariadb -o query` – queries the backups performed for MariaDB database.

SYNOPSIS

```
nbmariadb -o query -S master_server_name [-C client_name] [-P  
policy_name]
```

Description

The `nbmariadb -o query` command gets the backup using `-S` as the required parameter and `-C` and `-P` as optional parameters.

On Linux systems, the directory path to this command is `/usr/MariaDBAgent/`

On Windows systems, the directory path to this command is
`install_path/NBMariaDBAgent/`

Options

- `-C` Retrieves and lists all the backups of the specified client.
- `-P` Retrieves and lists all backups with the specified policy name.
- `-S` Configures the NetBackup master server.

nbmariadb -o delete

`nbmariadb -o delete` — deletes the backup information from the NetBackup catalog files.

SYNOPSIS

```
nbmariadb -o delete -S master_server_name -id db_backup_image_name
```

Description

The `nbmariadb -o delete` command deletes the backup information from the NetBackup catalog files, but retains the backups in the storage media.

The parameter `-S` and `-id` are the required parameters.

Options

`-id`

Specifies the backup using the backup image name.

`-S`

Configures the NetBackup master server.

Index

A

authenticating password 16

B

backup

- associated files 23
- backup information 23
- client name 23
- delete 23
- mariadb library path 23
- mariadb library version 23
- master server 23
- policy name 23
- query 23
- schedule name 23
- snapshot size 23
- symbolic link 23
- validate 23

C

CLIENT_NAME 18

D

DataStore policy 20
DB_BACKUP_ID 18
DB_PORT 18
DB_USER 18
Default Application Backup 20

F

features 10

I

installation 12
installing 16

L

license 11

M

MariaDB agent

- backup 9
- features 9
- redirected restore 9
- restore 9

MARIADB_LIB_INSTALL_PATH 18

MARIADB_TARGET_DIRECTORY 18

N

nbmariadb.conf file

- client 18
- command line 18
- configure 18
- default 18
- location 18
- parameters 18
- predefined settings 18
- required parameters 18

NBMARIADB_LOG_LEVEL 18

NBMARIADB_LOG_SIZE 18

O

operating systems 13

P

package 10, 15
platform files 15
POLICY_NAME 18
post installation requirements 14
prerequisites

- installed 13
- MariaDB database 13
- NetBackup 8.1 13

R

restore

- altnames directory 29
- data directory 29
- destination client 29

- restore *(continued)*
 - different client 29
 - different file path 29
 - different host 29
 - MariaDB services 29
 - ownership of data directory 29
 - parameters 29
 - portnum 29
 - target directory 29
- restores
 - redirected 29
 - target directory 29

S

- SCHEDULE_NAME 18
- snapshot 10
- SNAPSHOT_SIZE 18

U

- uninstalling 17
- user privileges 14

W

- workflow 10